


ORIGINAL LINE HB3A

Original spare part

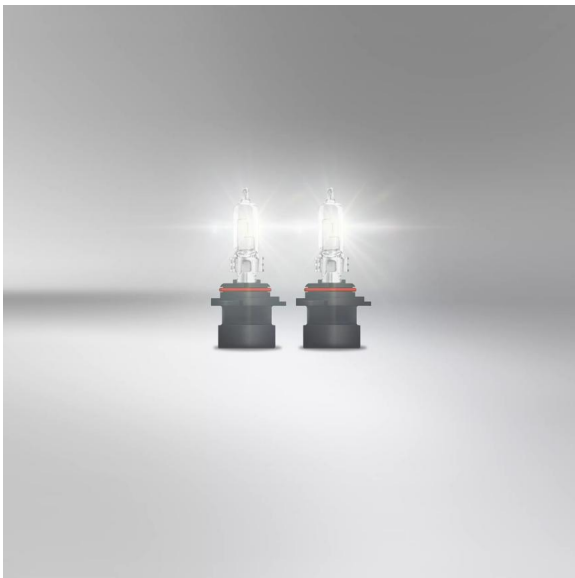

The cost-effective original spare parts

OSRAM ORIGINAL LINE halogen lamps offer convincing performance for standard requirements, are robust and cost-effective. They have already been successfully used in millions of new cars from renowned manufacturers, whether as standard initial equipment or original spare parts. Convince yourself of the excellent value for money, the reliable OEM quality and the wide product range of the ORIGINAL LINE.

Product datasheet

Technical data

Product information

| | |
|---|------------------------|
| Application (Category and Product specific) | Halogen headlight lamp |
|---|------------------------|

General Product Information

| | |
|------------------------|--------|
| Global order reference | 9005XS |
|------------------------|--------|

Electrical Data


| | |
|-----------------|--------------------|
| Power input | 73 W ¹⁾ |
| Nominal voltage | 12 V |
| Nominal wattage | 60 W |
| Test voltage | 13.2 V |

¹⁾ Maximum

Photometric Data

| | |
|-------------------------|---------|
| Nominal luminous flux | 1860 lm |
| Luminous flux tolerance | ±12 % |

Physical Attributes & Dimensions



| | |
|----------------|---------|
| Diameter | 12.0 mm |
| Product weight | 18.20 g |
| Length | 80.3 mm |
| Lamp base | P20d |

Lifetime Data

| | |
|-------------|--------|
| Lifespan B3 | 280 hr |
| Lifespan Tc | 550 hr |

Product datasheet

Capabilities

| | |
|------------|-----|
| Technology | HAL |
|------------|-----|

Certificates & standards

| | |
|--------------|------|
| ECE category | HB3A |
|--------------|------|

Environmental & Regulatory Information




| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
|---|------------------------------------|
| Primary article identifier | 0046135320408 4052899982567 |
| Candidate list substance 1 | No declarable substances contained |
| Declaration no. in SCIP database | No declarable substances contained |

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|-----------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4052899982567 | ORIGINAL LINE HB3A | Folding carton box 1 | 46 mm x 46 mm x 68 mm | 0.01 dm ³ | 23.00 g |
| 4052899982581 | ORIGINAL LINE HB3A | Shipping carton box 100 | 477 mm x 249 mm x 168 mm | 20.04 dm ³ | 2662.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File |
|---|
|  User instruction GPRS_Safety symbols instructions |
|  Addon Technical Information Product Certificates HAL |
|  ref_pim_amsproduct360degreeimages ORIGINAL HB3A 9005XS |

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Product datasheet



OSRAM