

LINEARlight FLEX High Power IP00

– LED modules for professional and industrial applications



Product family features

- Flexible and cuttable LED strip
- Dimmable with PWM technology

Product family benefits

- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Large selection of light colors
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Pre-wired LED strip, simple and quick plug-and-play installation

Areas of application

- Cove lighting
- Ceiling integration



Product family datasheet

Technical data

Product description	Electrical data						Photometrical data
	Nominal voltage	Type of current	Nominal wattage per meter	Rated wattage	Input voltage range	Accidental reverse input voltage protection up to	Light color LED
LF1200 -G3-927-09 L2	24.0 V	DC	10.6 W	95.70 W	23...25 V	25 V	White
LF1200 -G3-824-09 L2	24.0 V	DC	10.6 W	95.70 W	23...25 V	25 V	White
LF1200 -G3-827-09 L2	24.0 V	DC	8.9 W	80.10 W	23...25 V	25 V	White
LF1200 -G3-830-09 L2	24.0 V	DC	8.9 W	80.10 W	23...25 V	25 V	White
LF1200 -G3-840-09 L2	24.0 V	DC	8.1 W	73.20 W	23...25 V	25 V	White
LF1200 -G3-930-09 L2	24.0 V	DC	10.6 W	95.70 W	23...25 V	25 V	White
LF1200 -G3-940-09 L2	24.0 V	DC	10.0 W	89.60 W	23...25 V	25 V	White
LF2000 -G3-927-04 L1	24.0 V	DC	17.9 W	80.50 W	23...25 V	25 V	White
LF2000 -G3-824-04 L1	24.0 V	DC	17.9 W	80.50 W	23...25 V	25 V	White
LF2000 -G3-827-04 L1	24.0 V	DC	15.0 W	67.30 W	23...25 V	25 V	White
LF2000 -G3-830-04 L1	24.0 V	DC	15.0 W	67.30 W	23...25 V	25 V	White
LF2000 -G3-840-04 L1	24.0 V	DC	13.6 W	61.30 W	23...25 V	25 V	White
LF2000 -G3-930-04 L1	24.0 V	DC	17.9 W	80.50 W	23...25 V	25 V	White
LF2000 -G3-940-04 L1	24.0 V	DC	16.3 W	73.40 W	23...25 V	25 V	White
LF3000 -G3-927-03 L1	24.0 V	DC	21.8 W	84.30 W	23...25 V	25 V	
LF3000 -G3-824-03 L1	24.0 V	DC	27 W	81.00 W	23...25 V	25 V	
LF3000 -G3-827-03 L1	24.0 V	DC	23.7 W	71.10 W	23...25 V	25 V	
LF3000 -G3-830-03 L1	24.0 V	DC	23.7 W	71.10 W	23...25 V	25 V	
LF3000 -G3-930-03 L1	24.0 V	DC	21.8 W	84.30 W	23...25 V	25 V	
LF3000 -G3-940-03 L1	24.0 V	DC	25 W	75.00 W	23...25 V	25 V	
LF4000 -G3-827-03 L1	24.0 V	DC	28.9 W	86.70 W	23...25 V	25 V	White
LF4000 -G3-830-03 L1	24.0 V	DC	28.9 W	86.70 W	23...25 V	25 V	White
LF4000 -G3-840-03 L1	24.0 V	DC	28.9 W	86.70 W	23...25 V	25 V	White

Product description	Color render- ing index Ra	Lumi- nous flux per meter	Luminous efficacy	Light color (designation)	Color temper- ature	Total useful luminous flux	Standar d deviatio n of color matchin g
LF1200 -G3-927-09 L2	>90	1100 lm	103 lm/W	2700 K	2700 K		
LF1200 -G3-824-09 L2	>80	1200 lm	113 lm/W	2400 K	2400 K		
LF1200 -G3-827-09 L2	>80	1200 lm	135 lm/W	2700 K	2700 K		
LF1200 -G3-830-09 L2	>80	1200 lm	135 lm/W	3000 K	3000 K		
LF1200 -G3-840-09 L2	>80	1200 lm	147 lm/W	4000 K	4000 K		
LF1200 -G3-930-09 L2	>90	1200 lm	113 lm/W	3000 K	3000 K		
LF1200 -G3-940-09 L2	>90	1200 lm	120 lm/W	4000 K	4000 K		

Product family datasheet

Product description	Color render- ing index Ra	Lumi- nous flux per meter	Luminous efficacy	Light color (designation)	Color temper- ature	Total useful luminous flux	Standar d deviatio n of color matchin g
LF2000 -G3-927-04 L1	>90	1800 lm	101 lm/W	2700 K	2700 K	8100 lm	≤3 sdc
LF2000 -G3-824-04 L1	>80	2000 lm	112 lm/W	2400 K	2400 K	9000 lm	≤3 sdc
LF2000 -G3-827-04 L1	>80	2000 lm	134 lm/W	2700 K	2700 K		
LF2000 -G3-830-04 L1	>80	2000 lm	134 lm/W	3000 K	3000 K		
LF2000 -G3-840-04 L1	>80	2000 lm	147 lm/W	4000 K	4000 K		
LF2000 -G3-930-04 L1	>90	2000 lm	112 lm/W	3000 K	3000 K		
LF2000 -G3-940-04 L1	>90	2000 lm	123 lm/W	4000 K	4000 K		
LF3000 -G3-927-03 L1	>90	2800 lm	100 lm/W	2700 K	2700 K	8400 lm	≤3 sdc
LF3000 -G3-824-03 L1	>80	3000 lm	111 lm/W	2400 K	2400 K	9000 lm	≤3 sdc
LF3000 -G3-827-03 L1	>80	3000 lm	127 lm/W	2700 K	2700 K	9000 lm	≤3 sdc
LF3000 -G3-830-03 L1	>80	3000 lm	127 lm/W	3000 K	3000 K	9000 lm	≤3 sdc
LF3000 -G3-930-03 L1	>90	3000 lm	107 lm/W	3000 K	3000 K	9000 lm	≤3 sdc
LF3000 -G3-940-03 L1	>90	3100 lm	124 lm/W	4000 K	4000 K	9300 lm	≤3 sdc
LF4000 -G3-827-03 L1	>80	3750 lm	130 lm/W	2700 K	2700 K		
LF4000 -G3-830-03 L1	>80	3750 lm	130 lm/W	3000 K	3000 K		
LF4000 -G3-840-03 L1	>80	3850 lm	133 lm/W	4000 K	4000 K		

Product description	Light technical data				LED module information	
	LED pitch	Beam angle	Starting time	Warm-up time (60 %)	Number of LEDs per meter	Number of LEDs per smallest unit
LF1200 -G3-927-09 L2	14.29 mm	120 °			70	7
LF1200 -G3-824-09 L2	14.29 mm	120 °			70	7
LF1200 -G3-827-09 L2	14.29 mm	120 °			70	7
LF1200 -G3-830-09 L2	14.29 mm	120 °			70	7
LF1200 -G3-840-09 L2	14.29 mm	120 °			70	7
LF1200 -G3-930-09 L2	14.29 mm	120 °			70	7
LF1200 -G3-940-09 L2	14.29 mm	120 °			70	7
LF2000 -G3-927-04 L1	14.29 mm	120 °	< 0.5 s	< 0.50 s	70	7
LF2000 -G3-824-04 L1	14.29 mm	120 °	< 0.5 s	< 0.50 s	70	7
LF2000 -G3-827-04 L1	14.29 mm	120 °			70	7
LF2000 -G3-830-04 L1	14.29 mm	120 °			70	7
LF2000 -G3-840-04 L1	14.29 mm	120 °			70	7
LF2000 -G3-930-04 L1	14.29 mm	120 °			70	7
LF2000 -G3-940-04 L1	14.29 mm	120 °			70	7
LF3000 -G3-927-03 L1	14.29 mm	120 °	< 0.5 s	< 0.50 s	70	7
LF3000 -G3-824-03 L1	14.29 mm	120 °	< 0.5 s	< 0.50 s	70	7
LF3000 -G3-827-03 L1	14.29 mm	120 °	< 0.5 s	< 0.50 s	70	7
LF3000 -G3-830-03 L1	14.29 mm	120 °	< 0.5 s	< 0.50 s	70	7
LF3000 -G3-930-03 L1	14.29 mm	120 °	< 0.5 s	< 0.50 s	70	7
LF3000 -G3-940-03 L1	14.29 mm	120 °	< 0.5 s	< 0.50 s	70	7

Product family datasheet

Product description	Light technical data				LED module information	
	LED pitch	Beam angle	Starting time	Warm-up time (60 %)	Number of LEDs per meter	Number of LEDs per smallest unit
LF4000 -G3-827-03 L1	14.29 mm	120 °			70	7
LF4000 -G3-830-03 L1	14.29 mm	120 °			70	7
LF4000 -G3-840-03 L1	14.29 mm	120 °			70	7

Product description	Dimensions & weight				Temperatures & operating conditions	
	Length	Length – smallest unit	Cable length	Product weight	Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point
LF1200 -G3-927-09 L2	9000 mm	100.0 mm	500.0	131.00 g	45 °C	-20...90 °C ¹⁾
LF1200 -G3-824-09 L2	9000 mm	100.0 mm	500.0	131.00 g	45 °C	-20...90 °C ¹⁾
LF1200 -G3-827-09 L2	9000 mm	100.0 mm	500.0	131.00 g	40 °C	-20...90 °C ¹⁾
LF1200 -G3-830-09 L2	9000 mm	100.0 mm	500.0	131.00 g	40 °C	-20...90 °C ¹⁾
LF1200 -G3-840-09 L2	9000 mm	100.0 mm	500.0	131.00 g	40 °C	-20...90 °C ¹⁾
LF1200 -G3-930-09 L2	9000 mm	100.0 mm	500.0	131.00 g	45 °C	-20...90 °C ¹⁾
LF1200 -G3-940-09 L2	9000 mm	100.0 mm	500.0	131.00 g	40 °C	-20...90 °C ¹⁾
LF2000 -G3-927-04 L1	4500 mm	100.0 mm	500.0	65.00 g	50 °C	-20...90 °C ¹⁾
LF2000 -G3-824-04 L1	4500 mm	100.0 mm	500.0	65.00 g	50 °C	-20...90 °C ¹⁾
LF2000 -G3-827-04 L1	4500 mm	100.0 mm	500.0	65.00 g	45 °C	-20...90 °C ¹⁾
LF2000 -G3-830-04 L1	4500 mm	100.0 mm	500.0	65.00 g	45 °C	-20...90 °C ¹⁾
LF2000 -G3-840-04 L1	4500 mm	100.0 mm	500.0	65.00 g	45 °C	-20...90 °C ¹⁾
LF2000 -G3-930-04 L1	4500 mm	100.0 mm	500.0	65.00 g	50 °C	-20...90 °C ¹⁾
LF2000 -G3-940-04 L1	4500 mm	100.0 mm	500.0	65.00 g	45 °C	-20...90 °C ¹⁾
LF3000 -G3-927-03 L1	3000 mm	100.0 mm	500.0	46.00 g	60 °C	-20...90 °C ¹⁾
LF3000 -G3-824-03 L1	3000 mm	100.0 mm	500.0	46.00 g	60 °C	-20...90 °C ¹⁾
LF3000 -G3-827-03 L1	3000 mm	100.0 mm	500.0	46.00 g	55 °C	-20...90 °C ¹⁾
LF3000 -G3-830-03 L1	3000 mm	100.0 mm	500.0	46.00 g	55 °C	-20...90 °C ¹⁾
LF3000 -G3-930-03 L1	3000 mm	100.0 mm	500.0	46.00 g	60 °C	-20...90 °C ¹⁾
LF3000 -G3-940-03 L1	3000 mm	100.0 mm	500.0	46.00 g	60 °C	-20...90 °C ¹⁾
LF4000 -G3-827-03 L1	3000 mm	100.0 mm	500.0	46.00 g	60 °C	-20...90 °C ¹⁾
LF4000 -G3-830-03 L1	3000 mm	100.0 mm	500.0	46.00 g	60 °C	-20...90 °C ¹⁾
LF4000 -G3-840-03 L1	3000 mm	100.0 mm	500.0	46.00 g	60 °C	-20...90 °C ¹⁾

Product description	Ambient temperature range	Temperature range at storage	Lifespan		
			Rated lamp life time	Nominal lamp life time	Lumen main. fact. at end of nom. life time
LF1200 -G3-927-09 L2	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF1200 -G3-824-09 L2	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF1200 -G3-827-09 L2	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF1200 -G3-830-09 L2	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF1200 -G3-840-09 L2	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF1200 -G3-930-09 L2	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF1200 -G3-940-09 L2	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	

Product family datasheet

Product description	Ambient temperature range	Temperature range at storage	Lifespan		
			Rated lamp life time	Nominal lamp life time	Lumen main. fact. at end of nom. life time
LF2000 -G3-927-04 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	0.70
LF2000 -G3-824-04 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	0.70
LF2000 -G3-827-04 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF2000 -G3-830-04 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF2000 -G3-840-04 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF2000 -G3-930-04 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF2000 -G3-940-04 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF3000 -G3-927-03 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	0.70
LF3000 -G3-824-03 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	0.70
LF3000 -G3-827-03 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	0.70
LF3000 -G3-830-03 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	0.70
LF3000 -G3-930-03 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	0.70
LF3000 -G3-940-03 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	0.70
LF4000 -G3-827-03 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF4000 -G3-830-03 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	
LF4000 -G3-840-03 L1	-20...+50 °C ²⁾	-40...80 °C	60000 h	60000 h	

Product description	Number of switching cycles	Additional product data		Capabilities
		Predecessor EAN	ID of contained light source	Lowest bending radius
LF1200 -G3-927-09 L2		4052899953321	LS_TRV_216678	20 mm
LF1200 -G3-824-09 L2		4052899953062	LS_TRV_216174	20 mm
LF1200 -G3-827-09 L2		4052899953079	LS_TRV_216258	20 mm
LF1200 -G3-830-09 L2		4052899953086	LS_TRV_216342	20 mm
LF1200 -G3-840-09 L2		4052899953093	LS_TRV_216426	20 mm
LF1200 -G3-930-09 L2		4052899953338	LS_TRV_216762	20 mm
LF1200 -G3-940-09 L2		4052899953345	LS_TRV_216846	20 mm
LF2000 -G3-927-04 L1	› 15000	4052899963993	LS_TRV_217518	20 mm
LF2000 -G3-824-04 L1	› 15000	4052899952997	LS_TRV_217014	20 mm
LF2000 -G3-827-04 L1		4052899953000	LS_TRV_217098	20 mm
LF2000 -G3-830-04 L1		4052899953017	LS_TRV_217182	20 mm
LF2000 -G3-840-04 L1		4052899953024	LS_TRV_217266	20 mm
LF2000 -G3-930-04 L1		4052899964006	LS_TRV_217602	20 mm
LF2000 -G3-940-04 L1		4052899964013	LS_TRV_217686	20 mm
LF3000 -G3-927-03 L1	15000	4052899963948, 4062172143172	LS_TRV_286598	20 mm
LF3000 -G3-824-03 L1	15000	4052899952928, 4062172143059	LS_TRV_286597	20 mm
LF3000 -G3-827-03 L1	15000	4062172143073	LS_TRV_217938	20 mm
LF3000 -G3-830-03 L1	15000	4062172143097	LS_TRV_218022	20 mm
LF3000 -G3-930-03 L1	15000	4062172143196	LS_TRV_286599	20 mm
LF3000 -G3-940-03 L1	15000	4052899963962, 4062172143219	LS_TRV_286600	20 mm
LF4000 -G3-827-03 L1		4052899952867	LS_TRV_218610	20 mm

Product family datasheet

Product description	Number of switching cycles	Additional product data		Capabilities
		Predecessor EAN	ID of contained light source	Lowest bending radius
LF4000 -G3-830-03 L1		4052899952874	LS_TRV_218694	20 mm
LF4000 -G3-840-03 L1		4052899952881	LS_TRV_218778	20 mm

Product description	Self-adhesive	With connection set	With end piece	Certificates & standards
				Standards
LF1200 -G3-927-09 L2				CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-824-09 L2				CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-827-09 L2	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-830-09 L2	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-840-09 L2	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-930-09 L2				CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-940-09 L2				CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-927-04 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-824-04 L1				CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-827-04 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-830-04 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-840-04 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-930-04 L1				CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-940-04 L1				CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF3000 -G3-927-03 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750

Product family datasheet

				Certificates & standards
Product description	Self-adhesive	With connection set	With end piece	Standards
LF3000 -G3-824-03 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF3000 -G3-827-03 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF3000 -G3-830-03 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF3000 -G3-930-03 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF3000 -G3-940-03 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF4000 -G3-827-03 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF4000 -G3-830-03 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF4000 -G3-840-03 L1	Yes	No	No	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750

				Logistical data
Product description	Type of protection	Energy efficiency class of the contained light source	Energy consumption	Commodity code
LF1200 -G3-927-09 L2	IP00	F		85395100000
LF1200 -G3-824-09 L2	IP00	F		85395100000
LF1200 -G3-827-09 L2	IP00	E		85395100000
LF1200 -G3-830-09 L2	IP00	E		85395100000
LF1200 -G3-840-09 L2	IP00	E		85395100000
LF1200 -G3-930-09 L2	IP00	F		85395100000
LF1200 -G3-940-09 L2	IP00	F		85395100000
LF2000 -G3-927-04 L1	IP00	F	89 kWh/1000h	85395100000
LF2000 -G3-824-04 L1	IP00	F	89 kWh/1000h	85395100000
LF2000 -G3-827-04 L1	IP00	E		85395100000
LF2000 -G3-830-04 L1	IP00	E		85395100000
LF2000 -G3-840-04 L1	IP00	E		85395100000
LF2000 -G3-930-04 L1	IP00	F		85395100000
LF2000 -G3-940-04 L1	IP00	F		85395100000
LF3000 -G3-927-03 L1	IP00	F		85395100000
LF3000 -G3-824-03 L1	IP00	F		85395100000
LF3000 -G3-827-03 L1	IP00	F		85395100000
LF3000 -G3-830-03 L1	IP00	E		85395100000
LF3000 -G3-930-03 L1	IP00	F		85395100000
LF3000 -G3-940-03 L1	IP00	E		85395100000

Product family datasheet

Product description	Type of protection	Energy efficiency class of the contained light source	Energy consumption	Logistical data
				Commodity code
LF4000 -G3-827-03 L1	IP00	F		85395100000
LF4000 -G3-830-03 L1	IP00	E		85395100000
LF4000 -G3-840-03 L1	IP00	E		85395100000

Product description	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1
LF1200 -G3-927-09 L2	07-07-2023	4062172142694	Lead	7439-92-1
LF1200 -G3-824-09 L2	02-06-2023	4062172142571	Lead	7439-92-1
LF1200 -G3-827-09 L2	02-06-2023	4062172142595	Lead	7439-92-1
LF1200 -G3-830-09 L2	07-07-2023	4062172142618	Lead	7439-92-1
LF1200 -G3-840-09 L2	07-07-2023	4062172142632	Lead	7439-92-1
LF1200 -G3-930-09 L2	19-05-2023	4062172142717	Lead	7439-92-1
LF1200 -G3-940-09 L2	07-07-2023	4062172142731	Lead	7439-92-1
LF2000 -G3-927-04 L1	07-07-2023	4062172142939	Lead	7439-92-1
LF2000 -G3-824-04 L1	07-07-2023	4062172142816	Lead	7439-92-1
LF2000 -G3-827-04 L1	07-07-2023	4062172142830	Lead	7439-92-1
LF2000 -G3-830-04 L1	07-07-2023	4062172142854	Lead	7439-92-1
LF2000 -G3-840-04 L1	02-06-2023	4062172142878	Lead	7439-92-1
LF2000 -G3-930-04 L1	26-05-2023	4062172142953	Lead	7439-92-1
LF2000 -G3-940-04 L1	07-07-2023	4062172142977	Lead	7439-92-1
LF3000 -G3-927-03 L1	07-07-2023	4062172263856	Lead	7439-92-1
LF3000 -G3-824-03 L1	07-07-2023	4062172263733	Lead	7439-92-1
LF3000 -G3-827-03 L1	07-07-2023	4062172263757	Lead	7439-92-1
LF3000 -G3-830-03 L1	07-07-2023	4062172263771	Lead	7439-92-1
LF3000 -G3-930-03 L1	07-07-2023	4062172263870	Lead	7439-92-1
LF3000 -G3-940-03 L1	07-07-2023	4062172263894	Lead	7439-92-1
LF4000 -G3-827-03 L1	07-07-2023	4062172143271	Lead	7439-92-1
LF4000 -G3-830-03 L1	07-07-2023	4062172143295	Lead	7439-92-1
LF4000 -G3-840-03 L1	19-05-2023	4062172143318	Lead	7439-92-1

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF1200 -G3-927-09 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	770fe782-d326-4e01-ac38-c62ca8ded41c

Product family datasheet

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF1200 -G3-824-09 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	2f651e90-46e5-48fb-a1de-b17119b5ca93
LF1200 -G3-827-09 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	4147a6a9-6ef2-4afe-91f8-77ec0ef8cc81
LF1200 -G3-830-09 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	bf917dd0-ee4a-493b-beea-282eb1f56af1
LF1200 -G3-840-09 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	13cd1708-a073-43d7-aa2c-570040ab136c
LF1200 -G3-930-09 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	32844fed-0704-4586-8405-578904e4b19a
LF1200 -G3-940-09 L2	The identification of the Candidate List substance is sufficient to allow safe use of the article.	8823c4e6-c767-4546-ad88-5bde60302ed5
LF2000 -G3-927-04 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	c617985c-5d04-49dc-9085-60a740ada7c6
LF2000 -G3-824-04 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	a83efe7b-ba1c-4913-b23c-c13922576da7
LF2000 -G3-827-04 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	d556305b-e930-40bc-95a8-aeba057cf0c6

Product family datasheet

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF2000 -G3-830-04 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	dab7364f-ee8b-4961-bc19-db02ff9b8708
LF2000 -G3-840-04 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	c67a7d79-ad5c-425e-ade3-d6d8edc611f3
LF2000 -G3-930-04 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	72bb3267-a389-41e7-9ba7-86ca30523ed0
LF2000 -G3-940-04 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	9f4d3eac-a129-4617-b662-27775ccb6ba3
LF3000 -G3-927-03 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	30c5fd40-35e2-4d59-88bb-5726b3dcdf7f
LF3000 -G3-824-03 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	52061236-c34b-4d4a-ab7f-8859c519af9f
LF3000 -G3-827-03 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	7efd1c5b-fd8d-4261-8209-d6a7c714111b
LF3000 -G3-830-03 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	51919ec2-4652-482d-bb28-49f00b13100b
LF3000 -G3-930-03 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	0ef3a646-7b40-41f9-9b17-3da593ed77c7


Product family datasheet

Product description	Safe Use Instruction	Declaration No. in SCIP database
LF3000 -G3-940-03 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	6578871f-23d4-4bf6-b5b3-f23e1a85fc02
LF4000 -G3-827-03 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	36f2e25b-5a35-470d-9d0a-735fbba6ebc8
LF4000 -G3-830-03 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	19a63ffc-fec3-4802-b872-c57f95e02dbf
LF4000 -G3-840-03 L1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	c92c1abc-ed18-49e8-80a3-ae6148da7187

1) Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

2) Rated ambient temp. 25°C/Providing that temperature at Tc point is below max value during operation/Temperature ramping for environmental testing acc. to IEC 62717, 1K/min


Product family datasheet

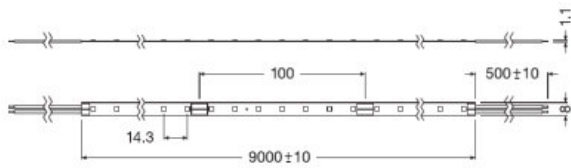

LINEARlight Flex Power drawing 1200 L2



LINEARlight Flex Power drawing 1200 L2

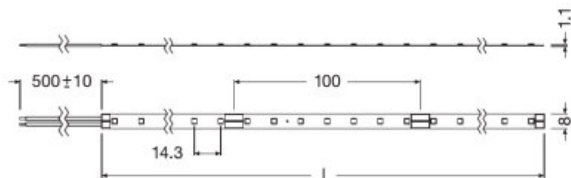

LINEARlight Flex Power drawing 200030004000



LINEARlight Flex Power drawing 200030004000

Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Quick installation with optional SLIM TRACK System
- Perfectly matched to OPTOTRONIC 24 V electronic control gears

Application advice

For more detailed application information and graphics please see product datasheet.

Additional product information

- Some LED modules are equipped with a self-adhesive tape for attaching the LED module to suitable materials, such as aluminum profiles, which must be clean and free of oil or silicone coatings, as well as other dirt/dust particles. The adhesive tape is intended for single use and if removed may damage the material to which it is stuck and the LED module itself, which must then be scrapped. Use the adhesive tape when the installation material temperature is in the 18 °C...35 °C range. Complete adhesion takes up to 72 h.
- LED modules are designed for static installations in accordance with IPC 6013C – Use A. Take material vibrations, repetitive torsion, and elongation/compression into account.
- If the operating environment covers a broad temperature range (e.g. outdoor applications) and the operating length is longer than 2 m, the use of adequate mounting surfaces is required. The use of an additional thicker adhesive tape between LED module and mounting surface is also recommended in order to absorb the stress of any mismatch in expansion. Assure enough space for module expansion with increasing temperature.
- The manufacturer is not responsible for damage due to chemical corrosion. The user must provide suitable protection against corrosive agents such as moisture and condensation and any other harmful elements/compounds. Make certain to avoid corrosive atmospheres. According to the current state of LED technology, hydrogen sulfide (H₂S) causes accelerated corrosion which leads to shortened lifetime or premature failure. Sources of H₂S may be rubber, foam rubber, soft-foam tapes, rubber-based sealing, natural sources (e.g. sulfur springs), etc. To avoid H₂S from sulfur-vulcanized rubber use silicon-based materials or peroxide-crosslinked rubber instead. Follow the recommendations in the material datasheet of the rubber supplier.
- IP00 LED modules, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Conformal coating treatment is possible, however materials must be selected properly in order to avoid product damage or impaired performance; the user must also completely seal the cut parts (ends/edges).
- For applications involving exposure to humidity and dust the module must be protected by a fixture or housing with a suitable IP protection class.
- Consult OSRAM Technical Service for further advice.
- Only a qualified electrician may install the module.
- Handle with care and ensure that there is no mechanical product damage, including damage to invisible internal electronics parts.
- Exceeding maximum operating and storage temperature ratings can reduce the expected lifetime or even destroy the LED module. The temperature of the LED module must be measured at the T_c-point in accordance with EN 60598-1 under steady-state conditions, considering the worst case; drive all channels at 100 % power. Refer to the product drawing for the exact location of the T_c-point.
- Exceeding the maximum ratings for the operating voltage causes hazardous overload and will likely destroy the LED module.
- Installation of LED modules and connection to the power supply must comply with all applicable electrical and safety standards.
- Observe correct polarity and wiring diagrams! Incorrect polarity or wrong wiring can cause unpredictable permanent damage or even failure of the product.
- Never exceed the maximum operable length, including daisy-chaining connections.
- Always ensure electrical isolation between the LED module and the mounting surface, especially in the vicinity of connections or cut ends.
- IP00 LED modules are ESD-sensitive; take adequate precautions during installation and operation of the products.
- Use only SELV LED drivers in accordance with applicable lighting standards and LED module ratings. In order to safely operate OSRAM LED modules it is necessary to supply them with an electronically stabilized power supply providing protection against short circuits, overload and overheating. To simplify the approval process of the luminaire/installation, the electronic power supplies control gear for LED modules must bear the CE and ENEC marking. In Europe the Declarations of Conformity must include at least the following standards: EN 61347-2-13, EN 55015, EN 61547 and EN 61000-3-2. ENEC certification will be based on EN 61347-2-13 and EN 62384. OSRAM OPTOTRONIC LED drivers comply with all relevant standards and guarantee safe operation; see the relevant brochure for more detailed information about OSRAM OPTOTRONIC.
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

Sales and Technical Support

Product family datasheet

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction LINEARlight FLEX POWER
	Product Datasheet LINEARlight Flex Power Specification Sheet
	Brochures Light is freedom of design (EN)
	Certificates EAC Certificate
	Certificates UL Certificate
	Certificates ENEC10_VDE Certificate
	Certificates CB TEST CERTIFICATE DE1-57844
	Declarations of conformity LF HP G3 CE 4160937 280623
	Declarations of conformity LF HP G3 CE 3420012 03 071119
	Declarations of conformity EU Declaration of conformity
	Declarations of conformity Manufacturer declaration
	Eulumdat LF1200-G3-927-09 L2 LDT 28032022
	IES data LF1200-G3-927-09 L2 IES 28032022
	Certificates VDE ENEC CERTIFICATE 40052516 160823
	Eulumdat LF1200-G3-824-09 L2 LDT 28032022
	IES data LF1200-G3-824-09 L2 IES 28032022
	Eulumdat LF1200-G3-827-09 L2 LDT 28032022
	IES data LF1200-G3-827-09 L2 IES 28032022
	Eulumdat LF1200-G3-830-09 L2 LDT 28032022

Product family datasheet

	IES data LF1200-G3-830-09 L2 IES 28032022
	Eulumdat LF1200-G3-840-09 L2 LDT 28032022
	IES data LF1200-G3-840-09 L2 IES 28032022
	Eulumdat LF1200-G3-930-09 L2 LDT 28032022
	IES data LF1200-G3-930-09 L2 IES 28032022
	Eulumdat LF1200-G3-940-09 L2 LDT 28032022
	IES data LF1200-G3-940-09 L2 IES 28032022
	Eulumdat LF2000-G3-927-04 L1 LDT 28032022
	IES data LF2000-G3-927-04 L1 IES 28032022
	Eulumdat LF2000-G3-824-04 L1 LDT 28032022
	IES data LF2000-G3-824-04 L1 IES 28032022
	Eulumdat LF2000-G3-827-04 L1 LDT 28032022
	IES data LF2000-G3-827-04 L1 IES 28032022
	Eulumdat LF2000-G3-830-04 L1 LDT 28032022
	IES data LF2000-G3-830-04 L1 IES 28032022
	Eulumdat LF2000-G3-840-04 L1 LDT 28032022
	IES data LF2000-G3-840-04 L1 IES 28032022
	Eulumdat LF2000-G3-930-04 L1 LDT 28032022
	IES data LF2000-G3-930-04 L1 IES 28032022
	Eulumdat LF2000-G3-940-04 L1 LDT 28032022
	IES data LF2000-G3-940-04 L1 IES 28032022
	Eulumdat LF3000-G3-927-03 L1 V2 LDT 28032022
	IES data LF3000-G3-927-03 L1 V2 IES 28032022

Product family datasheet

	Eulumdat LF3000-G3-824-03 L1 V2 LDT 28032022
	IES data LF3000-G3-824-03 L1 V2 IES 28032022
	Eulumdat LF3000-G3-827-03 L1 V2 LDT 28032022
	IES data LF3000-G3-827-03 L1 V2 IES 28032022
	Eulumdat LF3000-G3-830-03 L1 V2 LDT 28032022
	IES data LF3000-G3-830-03 L1 V2 IES 28032022
	Eulumdat LF3000-G3-930-03 L1 V2 LDT 28032022
	IES data LF3000-G3-930-03 L1 V2 IES 28032022
	Eulumdat LF3000-G3-940-03 L1 V2 LDT 28032022
	IES data LF3000-G3-940-03 L1 V2 IES 28032022
	Eulumdat LF4000-G3-827-03 L1 LDT 28032022
	IES data LF4000-G3-827-03 L1 IES 28032022
	Eulumdat LF4000-G3-830-03 L1 LDT 28032022
	IES data LF4000-G3-830-03 L1 IES 28032022
	Eulumdat LF4000-G3-840-03 L1 LDT 28032022
	IES data LF4000-G3-840-03 L1 IES 28032022

Product family datasheet

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172142694	LF1200 -G3-927-09 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1981.00 g
4062172142571	LF1200 -G3-824-09 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1981.00 g
4062172142595	LF1200 -G3-827-09 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1981.00 g
4062172142618	LF1200 -G3-830-09 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1981.00 g
4062172142632	LF1200 -G3-840-09 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1981.00 g
4062172142717	LF1200 -G3-930-09 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1981.00 g
4062172142731	LF1200 -G3-940-09 L2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1981.00 g
4062172142939	LF2000 -G3-927-04 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1453.00 g
4062172142816	LF2000 -G3-824-04 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1453.00 g
4062172142830	LF2000 -G3-827-04 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1453.00 g
4062172142854	LF2000 -G3-830-04 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1453.00 g

Product family datasheet

Logistical Data

4062172142878	LF2000 -G3-840-04 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1453.00 g
4062172142953	LF2000 -G3-930-04 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1453.00 g
4062172142977	LF2000 -G3-940-04 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1453.00 g
4062172263856	LF3000 -G3-927-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1301.00 g
4062172263733	LF3000 -G3-824-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1301.00 g
4062172263757	LF3000 -G3-827-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1301.00 g
4062172263771	LF3000 -G3-830-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1301.00 g
4062172263870	LF3000 -G3-930-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1301.00 g
4062172263894	LF3000 -G3-940-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1301.00 g
4062172143271	LF4000 -G3-827-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1301.00 g
4062172143295	LF4000 -G3-830-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1301.00 g
4062172143318	LF4000 -G3-840-03 L1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1301.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
LF1200 -G3-927-09 L2	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF1200 -G3-927-09 L2	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF1200 -G3-927-09 L2	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF1200 -G3-927-09 L2	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF1200 -G3-927-09 L2	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF1200 -G3-927-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1200 -G3-927-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1200 -G3-927-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1200 -G3-927-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1200 -G3-927-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858

Product family datasheet

LF1200 -G3-927-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF1200 -G3-824-09 L2	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF1200 -G3-824-09 L2	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF1200 -G3-824-09 L2	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF1200 -G3-824-09 L2	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF1200 -G3-824-09 L2	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF1200 -G3-824-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1200 -G3-824-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1200 -G3-824-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1200 -G3-824-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1200 -G3-824-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-824-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF1200 -G3-827-09 L2	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF1200 -G3-827-09 L2	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF1200 -G3-827-09 L2	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF1200 -G3-827-09 L2	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF1200 -G3-827-09 L2	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF1200 -G3-827-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1200 -G3-827-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1200 -G3-827-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1200 -G3-827-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1200 -G3-827-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-827-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF1200 -G3-830-09 L2	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF1200 -G3-830-09 L2	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF1200 -G3-830-09 L2	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF1200 -G3-830-09 L2	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF1200 -G3-830-09 L2	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF1200 -G3-830-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1200 -G3-830-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1200 -G3-830-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1200 -G3-830-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1200 -G3-830-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-830-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF1200 -G3-840-09 L2	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF1200 -G3-840-09 L2	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF1200 -G3-840-09 L2	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF1200 -G3-840-09 L2	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676

Product family datasheet

LF1200 -G3-840-09 L2	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF1200 -G3-840-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1200 -G3-840-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1200 -G3-840-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1200 -G3-840-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1200 -G3-840-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-840-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF1200 -G3-930-09 L2	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF1200 -G3-930-09 L2	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF1200 -G3-930-09 L2	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF1200 -G3-930-09 L2	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF1200 -G3-930-09 L2	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF1200 -G3-930-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1200 -G3-930-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1200 -G3-930-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1200 -G3-930-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1200 -G3-930-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-930-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF1200 -G3-940-09 L2	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF1200 -G3-940-09 L2	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF1200 -G3-940-09 L2	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF1200 -G3-940-09 L2	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF1200 -G3-940-09 L2	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF1200 -G3-940-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1200 -G3-940-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1200 -G3-940-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1200 -G3-940-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1200 -G3-940-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-940-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF2000 -G3-927-04 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF2000 -G3-927-04 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF2000 -G3-927-04 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF2000 -G3-927-04 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF2000 -G3-927-04 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF2000 -G3-927-04 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF2000 -G3-927-04 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF2000 -G3-927-04 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF2000 -G3-927-04 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964

Product family datasheet

LF2000 -G3-927-04 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-927-04 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF2000 -G3-824-04 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF2000 -G3-824-04 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF2000 -G3-824-04 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF2000 -G3-824-04 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF2000 -G3-824-04 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF2000 -G3-824-04 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF2000 -G3-824-04 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF2000 -G3-824-04 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF2000 -G3-824-04 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF2000 -G3-824-04 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-824-04 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF2000 -G3-827-04 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF2000 -G3-827-04 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF2000 -G3-827-04 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF2000 -G3-827-04 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF2000 -G3-827-04 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF2000 -G3-827-04 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF2000 -G3-827-04 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF2000 -G3-827-04 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF2000 -G3-827-04 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF2000 -G3-827-04 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-827-04 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF2000 -G3-830-04 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF2000 -G3-830-04 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF2000 -G3-830-04 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF2000 -G3-830-04 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF2000 -G3-830-04 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF2000 -G3-830-04 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF2000 -G3-830-04 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF2000 -G3-830-04 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF2000 -G3-830-04 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF2000 -G3-830-04 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-830-04 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF2000 -G3-840-04 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF2000 -G3-840-04 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF2000 -G3-840-04 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638

Product family datasheet

LF2000 -G3-840-04 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF2000 -G3-840-04 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF2000 -G3-840-04 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF2000 -G3-840-04 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF2000 -G3-840-04 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF2000 -G3-840-04 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF2000 -G3-840-04 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-840-04 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF2000 -G3-930-04 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF2000 -G3-930-04 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF2000 -G3-930-04 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF2000 -G3-930-04 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF2000 -G3-930-04 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF2000 -G3-930-04 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF2000 -G3-930-04 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF2000 -G3-930-04 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF2000 -G3-930-04 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF2000 -G3-930-04 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-930-04 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF2000 -G3-940-04 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF2000 -G3-940-04 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF2000 -G3-940-04 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF2000 -G3-940-04 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF2000 -G3-940-04 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF2000 -G3-940-04 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF2000 -G3-940-04 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF2000 -G3-940-04 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF2000 -G3-940-04 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF2000 -G3-940-04 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-940-04 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF3000 -G3-927-03 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF3000 -G3-927-03 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF3000 -G3-927-03 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF3000 -G3-927-03 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF3000 -G3-927-03 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF3000 -G3-927-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF3000 -G3-927-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3000 -G3-927-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988

Product family datasheet

LF3000 -G3-927-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF3000 -G3-927-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF3000 -G3-927-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF3000 -G3-824-03 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF3000 -G3-824-03 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF3000 -G3-824-03 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF3000 -G3-824-03 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF3000 -G3-824-03 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF3000 -G3-824-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF3000 -G3-824-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3000 -G3-824-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF3000 -G3-824-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF3000 -G3-824-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF3000 -G3-824-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF3000 -G3-827-03 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF3000 -G3-827-03 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF3000 -G3-827-03 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF3000 -G3-827-03 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF3000 -G3-827-03 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF3000 -G3-827-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF3000 -G3-827-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3000 -G3-827-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF3000 -G3-827-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF3000 -G3-827-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF3000 -G3-827-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF3000 -G3-830-03 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF3000 -G3-830-03 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF3000 -G3-830-03 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF3000 -G3-830-03 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF3000 -G3-830-03 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF3000 -G3-830-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF3000 -G3-830-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3000 -G3-830-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF3000 -G3-830-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF3000 -G3-830-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF3000 -G3-830-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF3000 -G3-930-03 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF3000 -G3-930-03 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614

Product family datasheet

LF3000 -G3-930-03 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF3000 -G3-930-03 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF3000 -G3-930-03 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF3000 -G3-930-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF3000 -G3-930-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3000 -G3-930-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF3000 -G3-930-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF3000 -G3-930-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF3000 -G3-930-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF3000 -G3-940-03 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF3000 -G3-940-03 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF3000 -G3-940-03 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF3000 -G3-940-03 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF3000 -G3-940-03 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF3000 -G3-940-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF3000 -G3-940-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3000 -G3-940-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF3000 -G3-940-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF3000 -G3-940-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF3000 -G3-940-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF4000 -G3-827-03 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF4000 -G3-827-03 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF4000 -G3-827-03 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF4000 -G3-827-03 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF4000 -G3-827-03 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF4000 -G3-827-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF4000 -G3-827-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF4000 -G3-827-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF4000 -G3-827-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF4000 -G3-827-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF4000 -G3-827-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF4000 -G3-830-03 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF4000 -G3-830-03 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF4000 -G3-830-03 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF4000 -G3-830-03 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF4000 -G3-830-03 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF4000 -G3-830-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF4000 -G3-830-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889

Product family datasheet

LF4000 -G3-830-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF4000 -G3-830-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF4000 -G3-830-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF4000 -G3-830-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
LF4000 -G3-840-03 L1	CONN-FLEX -2P-050 KIT 10PCS	▶ 4062172179591
LF4000 -G3-840-03 L1	CONN-FLEX -2P-200 KIT 10PCS	▶ 4062172179614
LF4000 -G3-840-03 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF4000 -G3-840-03 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF4000 -G3-840-03 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF4000 -G3-840-03 L1	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF4000 -G3-840-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF4000 -G3-840-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF4000 -G3-840-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF4000 -G3-840-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF4000 -G3-840-03 L1	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.