

## TYREinflate 4000

TYREinflate 4000 OTIR4000



### Inflation Time

Inflate the tyre to the desired pressure in approximately 3,5 minutes<sup>1)2)</sup>



### Deflator Valve

For deflating too much air



### Digital Auto Stop

Automatic stop function when the preset pressure is reached



### Cordless and rechargeable

Can be used with or without direct power supply



### Rechargeable Digital Tyre Inflator

The OSRAM TYREinflate 4000 is a cordless and rechargeable tyre inflator with Li-Ion battery, making it an ideal companion for camping and road trips. The OTIR 4000 digital tyre inflator can inflate a tyre in just 3,5 minutes<sup>1)2)</sup>. The auto stop function and the deflator valve help to keep the tyres optimally inflated. The backlit LED display and integrated LED light provide improved readability of the pressure settings and improved illumination of the working area even in reduced visibility conditions or at night. Memory setting means you can store pressures for up to 4 vehicles.

OSRAM offers a 2-year guarantee<sup>1)</sup> on this product.

1) For precise conditions please refer to: [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

2) Based on inflating a 13" tyre from flat to 2.4 BAR

3) Measurements of the tyre pressure and inflation of the tyres to the optimum tyre pressure must always be conducted on cold tyres

# Product datasheet

## Technical data

### Product information

<b>Inflation time</b>	13 Inch Tyre- 0-35 PSI/2.4 BAR-3.5 min, 15 Inch Tyre- 0-35 PSI/2.4 BAR 6 min
<b>Max Pressure</b>	120PSI / 8.3 bar
<b>Air Hose Length</b>	60 cm
<b>Deflation valve</b>	Yes
<b>Power Cord Length</b>	USB-C = 1 m, DC = 3 m
<b>Charge Time (h)</b>	4 hr
<b>LED Light</b>	Yes
<b>Display Size</b>	45mm x 22 mm
<b>Measuring Units</b>	PSI, kPa, bar
<b>Preset Function</b>	Yes
<b>Auto stop</b>	Yes
<b>Storage Case</b>	Yes
<b>Accuracy (bar)</b>	Accuracy of measure: 35±1psi, Accuracy of control:35±1.5psi
<b>Flow rate (l/min)</b>	(35psi) 9l/min , (0psi) 15 l/min


### General Product Information

<b>Global order reference</b>	OTIR4000
-------------------------------	----------

### Electrical Data

<b>Nominal wattage</b>	120/90 W
<b>Operating Voltage</b>	DC12V/Battery DC7.4V
<b>Power Source</b>	Battery (5000mAh), 12V DC

### Physical Attributes & Dimensions

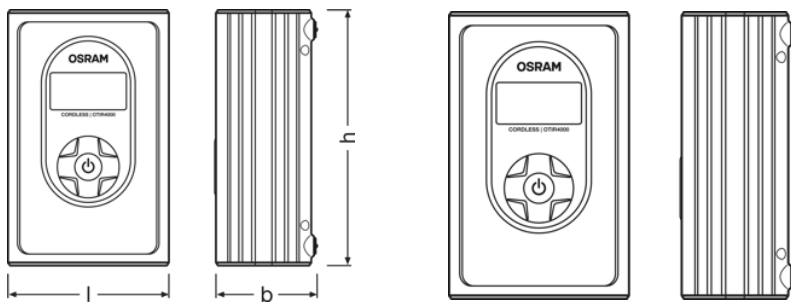

## Product datasheet

Length	61.0 mm
Width	95.0 mm
Height	150 mm

### Colors & materials

Material	Plastic
----------	---------

### Operating Conditions

Noise Level (dB)	90 dB
------------------	-------

### Additional product data

Display Type	Digital
Recommended to Use With	Car, Motorbike, Bicycle, Small Inflatables
Extras	Air hose, USB C charging cable, 12 V D.C cable, 3 inflator adaptors, storage case

### Capabilities

Accessories	Adaptors for bikes and inflatables
Fuse	15 A

### Environmental & Regulatory Information

<b>Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)</b>	
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration no. in SCIP database	593dbda7-6369-474c-8925-958ce33490fe

### Logistical Data



Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172306294	TYRE inflate 4000	Folding carton box 1	110 mm x 91 mm x 170 mm	1.70 dm <sup>3</sup>	785.00 g
4062172306300	TYRE inflate 4000	Shipping carton box 4	236 mm x 198 mm x 200 mm	9.35 dm <sup>3</sup>	3359.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Product datasheet

---

### Download Data

File	
	User instruction TYREinflate 4000
	Movie application TYREinflate 4000 Product Video (EN)

#### Legal advice

- 1) For precise conditions please refer to: [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)
  - 2) Based on inflating a 13" tyre from flat to 2.41 BAR
  - 3) Measurements of the tyre pressure and inflation of the tyres to the optimum tyre pressure must always be conducted on cold tyres
- Application advice: For more detailed application information and graphics please see product datasheet and the user instruction.

#### Application advice

For more detailed application information and graphics please see product datasheet.

#### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

# OSRAM