



Modified Sine Wave Inverter 12V DC 2000W




12V compatibility producing 230V AC with 2000W of power.

Will work with all 12V vehicles to produce 230V main power with 2000W of power for remote working




4000W peak power rating

To handle large power loads when initially starting an electrical device. Will drop back down to 2000W continuous supply.



2.1A USB Charging port

To charge mobile phones or smaller electronic devices at the same time as using the main power supply from the inverter.



Low battery alarm at 10.5V and low battery shutdown at 10.0V

Low battery alarm to alert operators to the fact that their vehicle battery is being drained and should stop using the inverter. When a vehicle's battery drops below 10V the inverter will switch off to preserve the vehicle battery to allow the vehicle to restart.



High-quality inverters for off-grid power needs

OSRAM POWERinvert PRO is an extensive range of professional heavy duty inverters for remote working. Available in either Pure Sine Wave or Modified Sine Wave for both 12V and 24V applications. OSRAM POWERinvert Pro inverters take the 12V or 24V DC vehicle electrical supply and invert into 230V AC mains power to run and operate electrical equipment from service vehicles. Pure Sine Wave Inverters produce a sine wave with the same frequency as mains power, with no distortion, to power sensitive electronics. Modified Inverters have distorted frequency, meaning they will power less complicated products such as fridges and power tools.

Technical data


Product information

Number Of Phases	Single
------------------	--------

Electrical data

Input voltage range	(12V NOM) 10 V - 16 V
Peak Amps	392
Continuous Power Rating (up to 12 hours)	2000 W
Output voltage	200 - 240 Vrms
No Load Current	< 0.8 A
Input Current	196 A

Dimensions & weight

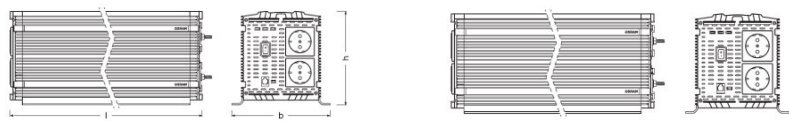

Input Cable Gauge / Length	600mm
----------------------------	-------

Lifespan

Guarantee	2 years
-----------	---------

Additional product data

Battery Connection	Terminal Nut & Bolt
Operating Temperature	-25 +45 °C
Efficient at 75% load	89 %
Low Battery Alarm	Yes
Low Battery Shutdown	Yes
Outpur Waveform	Modified Sine
Output Frequency	50 Hz
Power Saving Mode	No

Product datasheet

Programmable features

Thermal Protection	Yes
--------------------	-----

Certificates & standards

Standards	CE
-----------	----

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	07-03-2024
Primary Article Identifier	4052899631083
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	f4848e89-57c8-4ab5-809f-5926b20b6936

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899631083	Modified Sine Wave Inverter 12V DC 2000W	Folding carton box 1	450 mm x 207 mm x 222 mm	20.68 dm ³	5075.00 g
4062172322294	Modified Sine Wave Inverter 12V DC 2000W	Shipping carton box 1	473 mm x 230 mm x 248 mm	26.98 dm ³	5635.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File	
	User instruction POWERinvert PRO Modified Sine Wave Inverter

Safety advice

Tested and certified to the relevant EMC and LVD Directives.

Legal advice

Product datasheet

CE Approved

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

The OSRAM logo is displayed in a bold, orange, sans-serif font.