

## HRI 580 W F

SIRIUS HRI | High-pressure discharge lamps with reflector



### Areas of application

- Concert lighting
- Club and disco
- Stage and theatre
- Studio, TV and film
- Architecture & Architainment

### Product family benefits

- Lightweight and compact reflector lamps
- Perfectly suited for small and lightweight moving heads
- Optimized burner design allows any burning position
- High luminance through very short arc and high pressure
- Bright light for brilliant light effects
- Long lifetime
- Easy lamp replacement
- Stable light output over the entire lifetime



# Product datasheet

## Technical data


### Electrical data

Nominal wattage	58000 W
Nominal current	61 A
Nominal voltage	900 V

### Photometrical data

Nominal luminous flux	29500 lm
Color temperature	7000 K
Color rendering index Ra	75

### Dimensions & weight

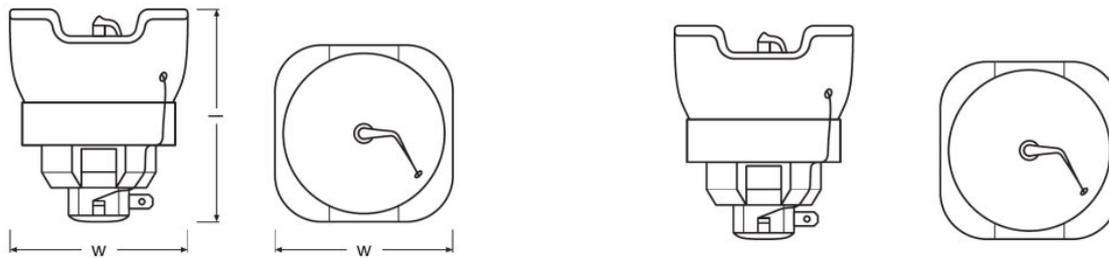

Diameter	650 mm
Length	650 mm

### Lifespan

Lifespan	1000 h
----------	--------

### Additional product data

Category	CUSTOMIZED
----------	------------

### Capabilities

Working distance	60 mm
------------------	-------

### Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	22-12-2023

## Product datasheet

<b>Primary Article Identifier</b>	4062172085267
<b>Candidate List Substance 1</b>	No declarable substances contained
<b>Declaration No. in SCIP database</b>	No declarable substances contained

## Product datasheet

---

### Safety advice

Because of their high luminance, UV radiation and high internal pressure during operation, SIRIUS HRI lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172085267	HRI 580 W F	Unpacked 1	12 mm x 12 mm x 65 mm	0.01 dm <sup>3</sup>	160.00 g
4062172085274	HRI 580 W F	Shipping carton box 60	414 mm x 352 mm x 310 mm	45.18 dm <sup>3</sup>	11046.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.