

## BackLED and BoxLED mounting profiles

Accessories for LED Modules for advertising and backlighting



### Product family features

- Universally applicable mounting profile for single or double-sided light boxes
- Overall length: 2,000 mm

### Product family benefits

- Can be easily shortened to any length
- Quick and easy mounting of the profile with self-tapping screws or pop rivets
- Quick and simple snap-in fixing of the LED modules, no tools required
- Robust aluminum profile

### Areas of application

- Advertising and lettering
- Backlighting of single and double-sided light boxes


# Product family datasheet

## Technical data

### Dimensions & weight

| Product description | Product weight |
|---------------------|----------------|
| BA -SM-MP           | 180.00 g       |

### Product line drawing

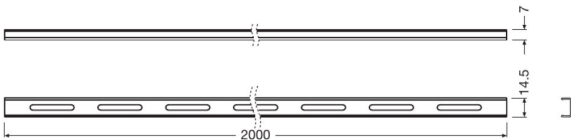

BA -SM-MP

### Logistical data

| Product description | Commodity code |
|---------------------|----------------|
| BA -SM-MP           | 76169990990    |

### Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

| Product description | Date of Declaration | Primary Article Identifier | Candidate List Substance 1         |
|---------------------|---------------------|----------------------------|------------------------------------|
| BA -SM-MP           | 18-02-2022          | 4052899264540              | No declarable substances contained |

| Product description | Declaration No. in SCIP database   |
|---------------------|------------------------------------|
| BA -SM-MP           | No declarable substances contained |

# Product family datasheet

## Equipment / Accessories

- BA-MP suitable for BackLED L, BoxLED XS
- BA-SM-MP suitable for BackLED S/M




## Application advice

For more detailed application information and graphics please see product datasheet.

## Sales and Technical Support

Sales and Technical Support [www.osram.com](http://www.osram.com)

## Download Data

| File  |   |
|---|---|
|    | CAD data<br>652650_CAD Daten MS Plus G15 mounting profile_IGS     |
|  | CAD data<br>652651_CAD Daten MS Plus G15 mounting profile_STEP    |
|  | CAD data PDF<br>652657_CAD Daten MS Plus G15 mounting profile_pdf |

## Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

# Product family datasheet

## Logistical Data

| Product code  | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume               | Gross weight |
|---------------|---------------------|------------------------------|--------------------------------------|----------------------|--------------|
| 4052899264540 | BA -SM-MP           | Shipping carton box<br>24    | 2020 mm x 64 mm x 43 mm              | 5.56 dm <sup>3</sup> | 4536.00 g    |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.